

SPARTAN SFS-1 & SFS-2 DUCT FROST THERMOSTAT




Model	Range	Differential	Switch	IP Rating	Bulb Length	Dimensions
SFS-1	-15/+15°C	2.5°C	230v SPDT 24 (10) AMP	IP43	6M	70H x 95W x 65D
SFS-2	-15/+15°C	Hand Reset (Fall in Temp)	230v SPDT 24 (10) AMP	IP43	6M	70H x 95W x 65D
SFS-1/W	-15/+15°C	2.5°C	230v SPDT 24 (10) AMP	IP65	6M	190H x 140W x 70D
SFS-2/W	-15/+15°C	Hand Reset (Fall in Temp)	230v SPDT 24 (10) AMP	IP65	6M	190H x 140W x 70D

Mounting

Fit capillary on downstream side of coil, covering as much of the surface area as possible.
Fit thermostat housing in higher temperature area.

Wiring

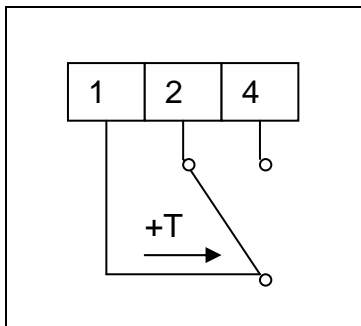

Terminals 1-2 close on fall in temperature.

Isolate device before removing terminal cover and follow all relevant safety precautions and regulations.
A Qualified Technician should check the unit before applying any voltage.

This information is produced for guidance only and is not guaranteed in any way.